







متوفر لدينا صناديق الحريق توريد بأسعار وجودة لا تقبل المنافسة





هاته: 054777503 غانه

- MATERIAL SUBMITTAL FOR FIRE HOSE CABINET

- PRODUCT (FG-2001R FGR-2001R)
- TECHNICAL DATA SHEETS (CATALOGUES).
- LPCB APPROVALS.
- PREVIOUS APPROVALS.














-FG-2001R

- DOUBLE DOOR,
- SURFACE MOUNTED,
- MILD STEEL,
- FIRE HOSE REEL CABINET



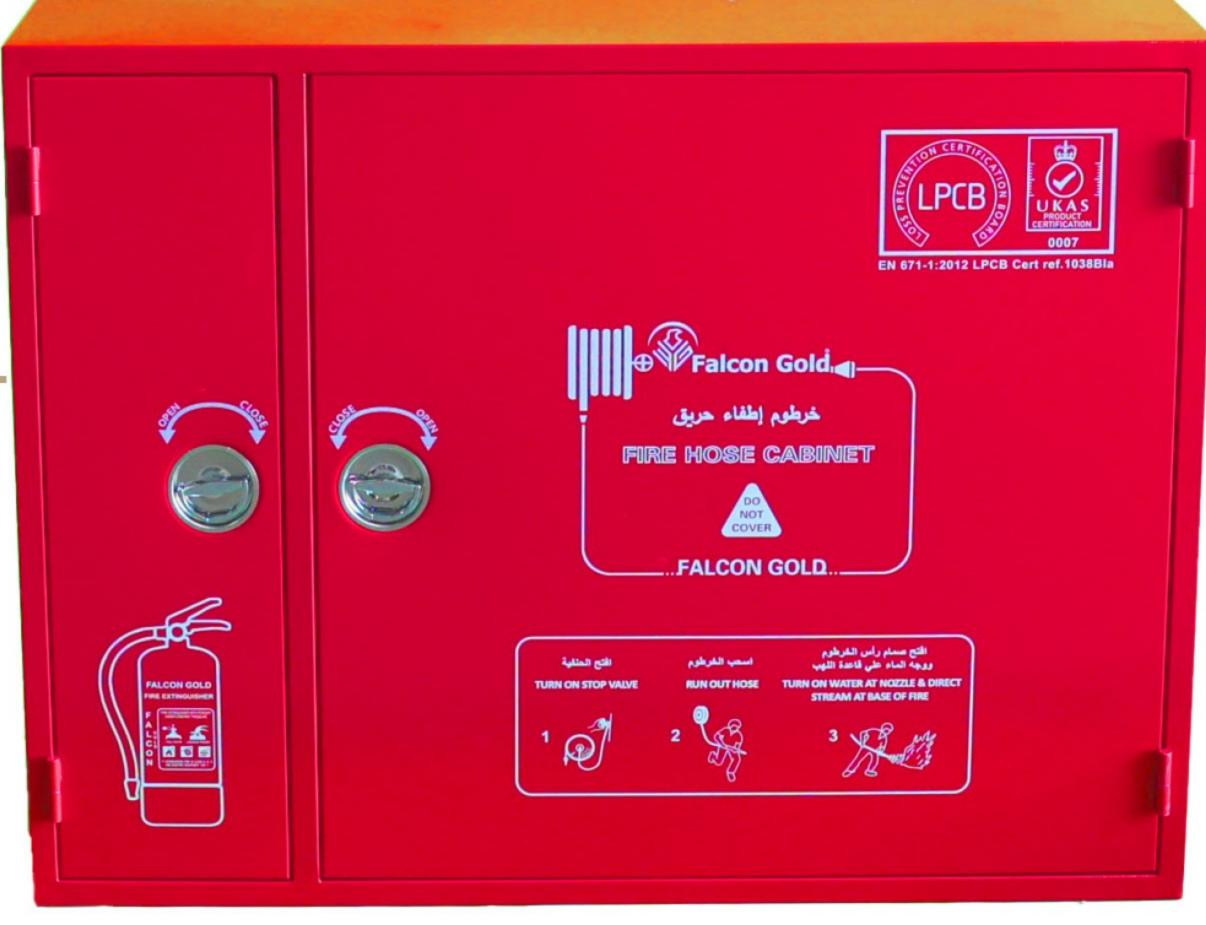





FOR SAFETY EQUIPMENT



-FGR-2001R

- DOUBLE DOOR,
- SURFACE MOUNTED,
- MILD STEEL,
- VERTICAL HOSE REEL CABINET

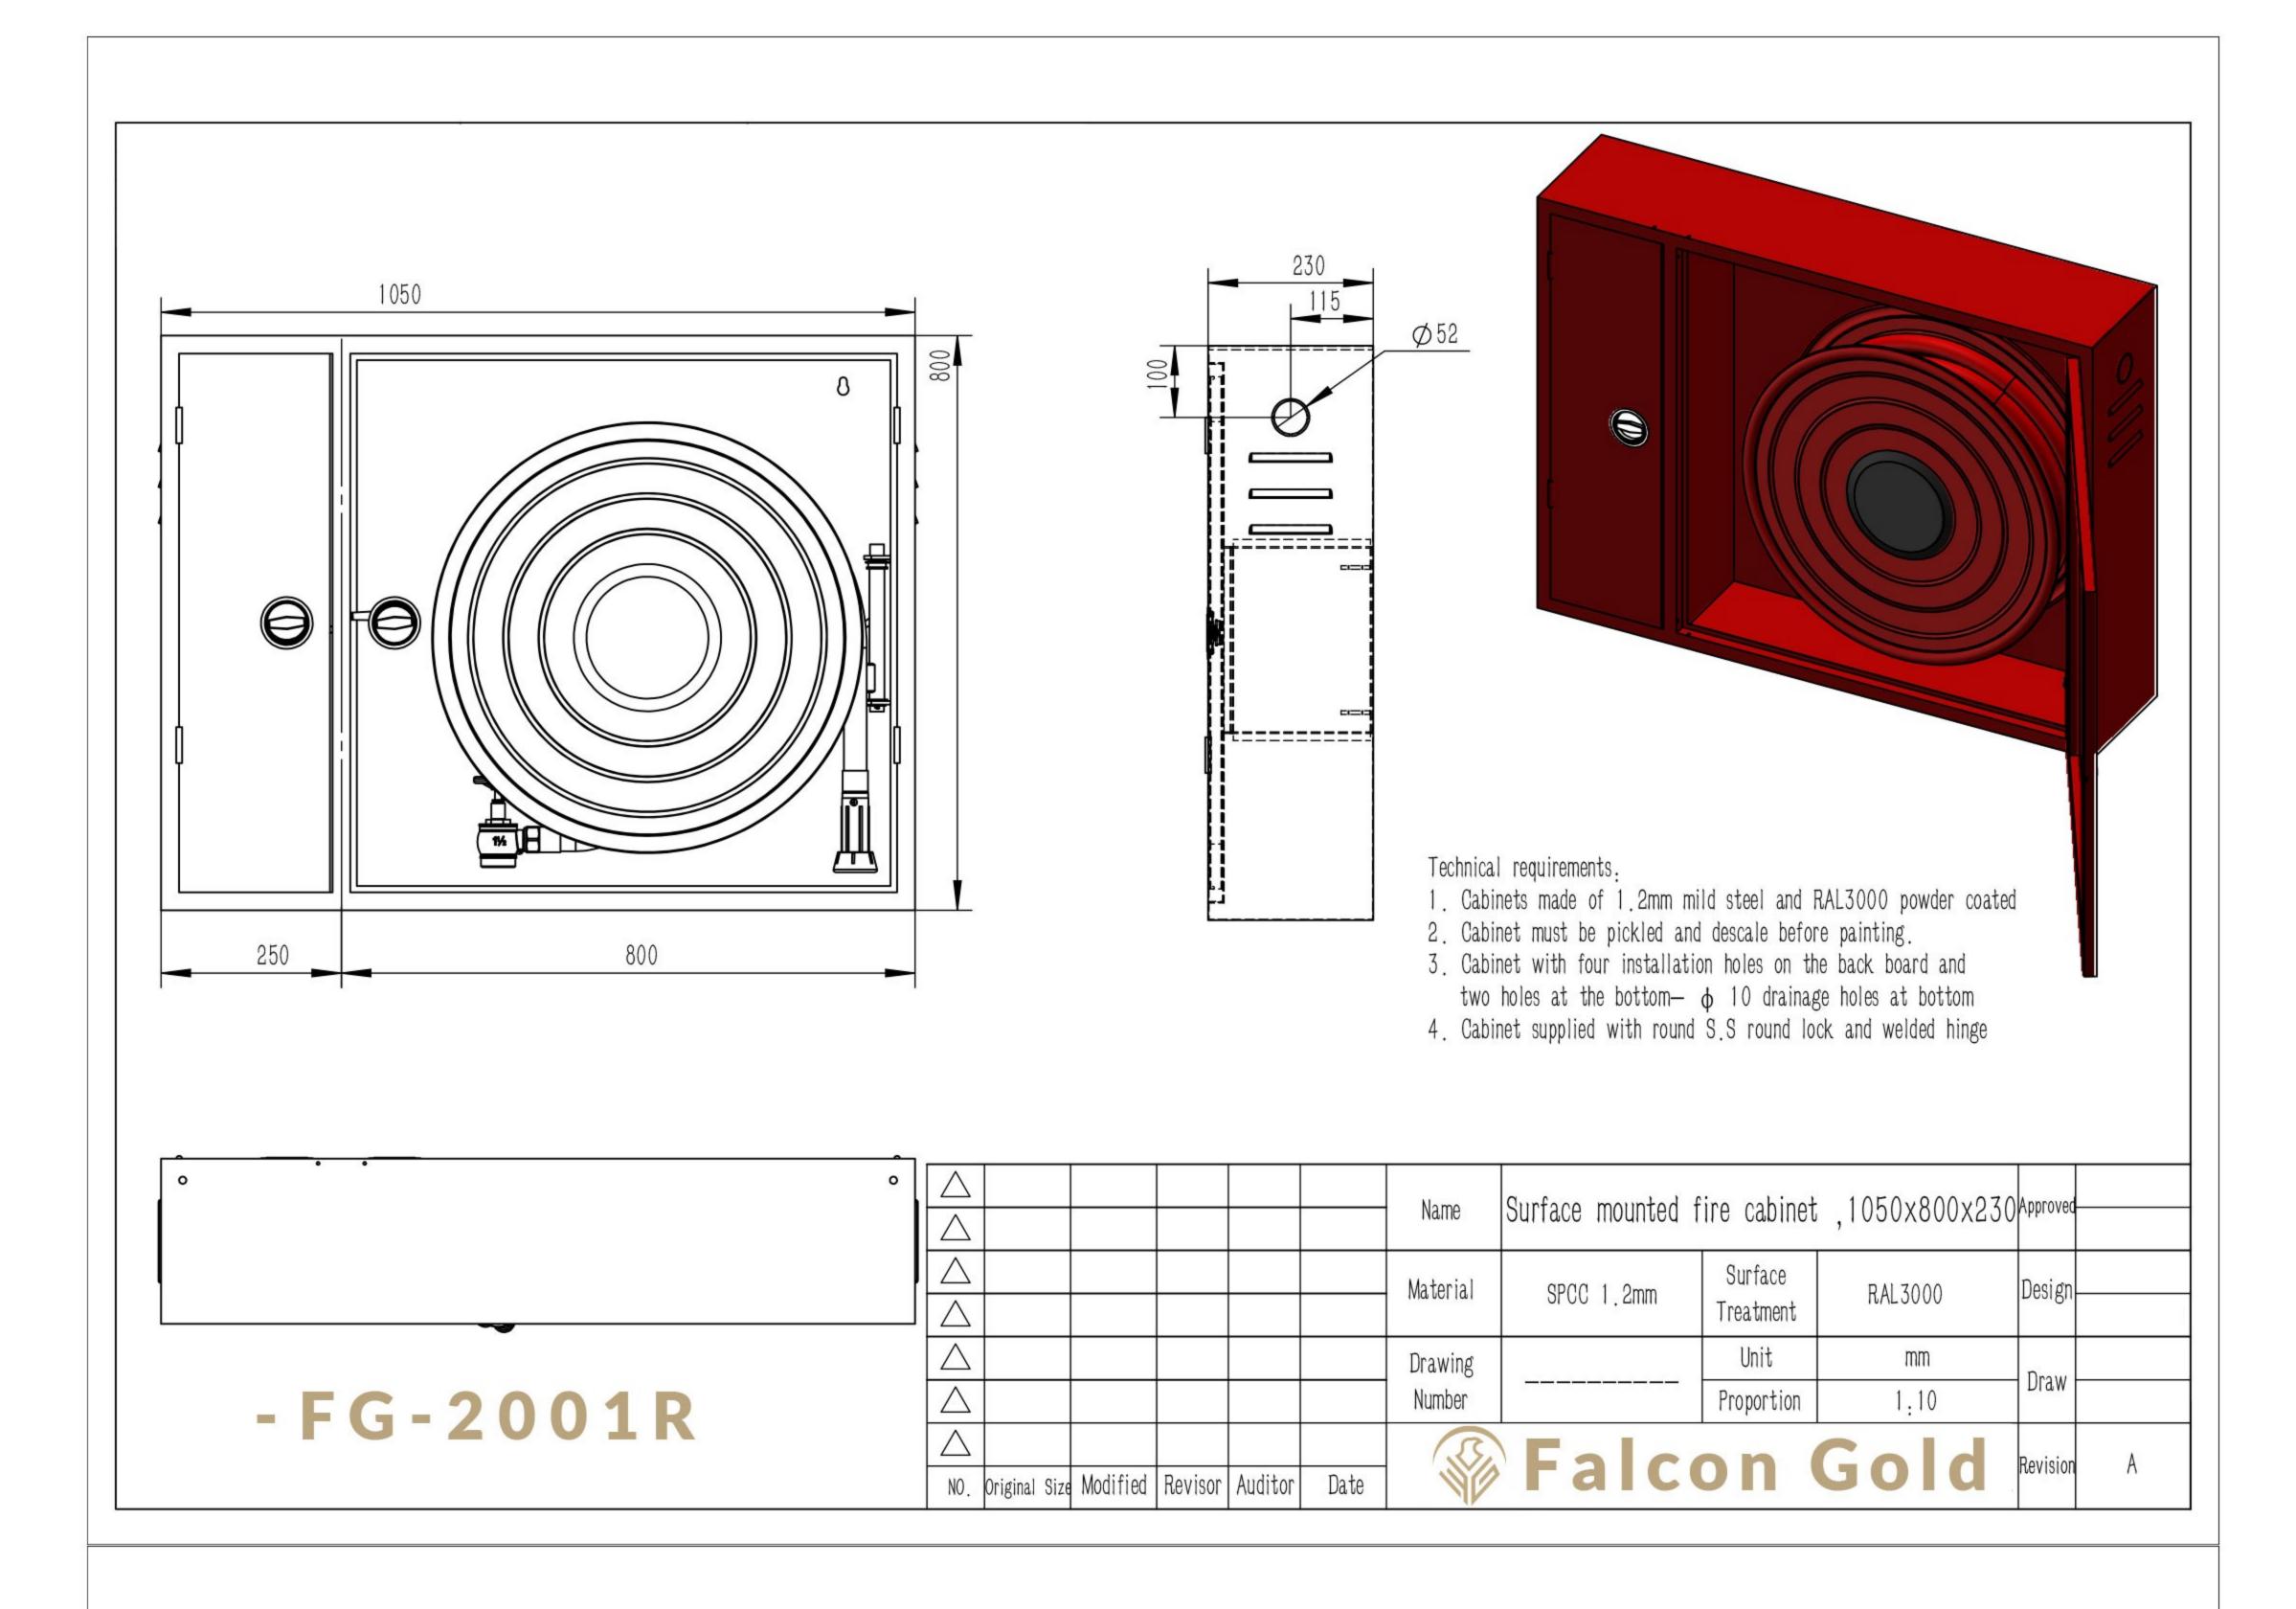

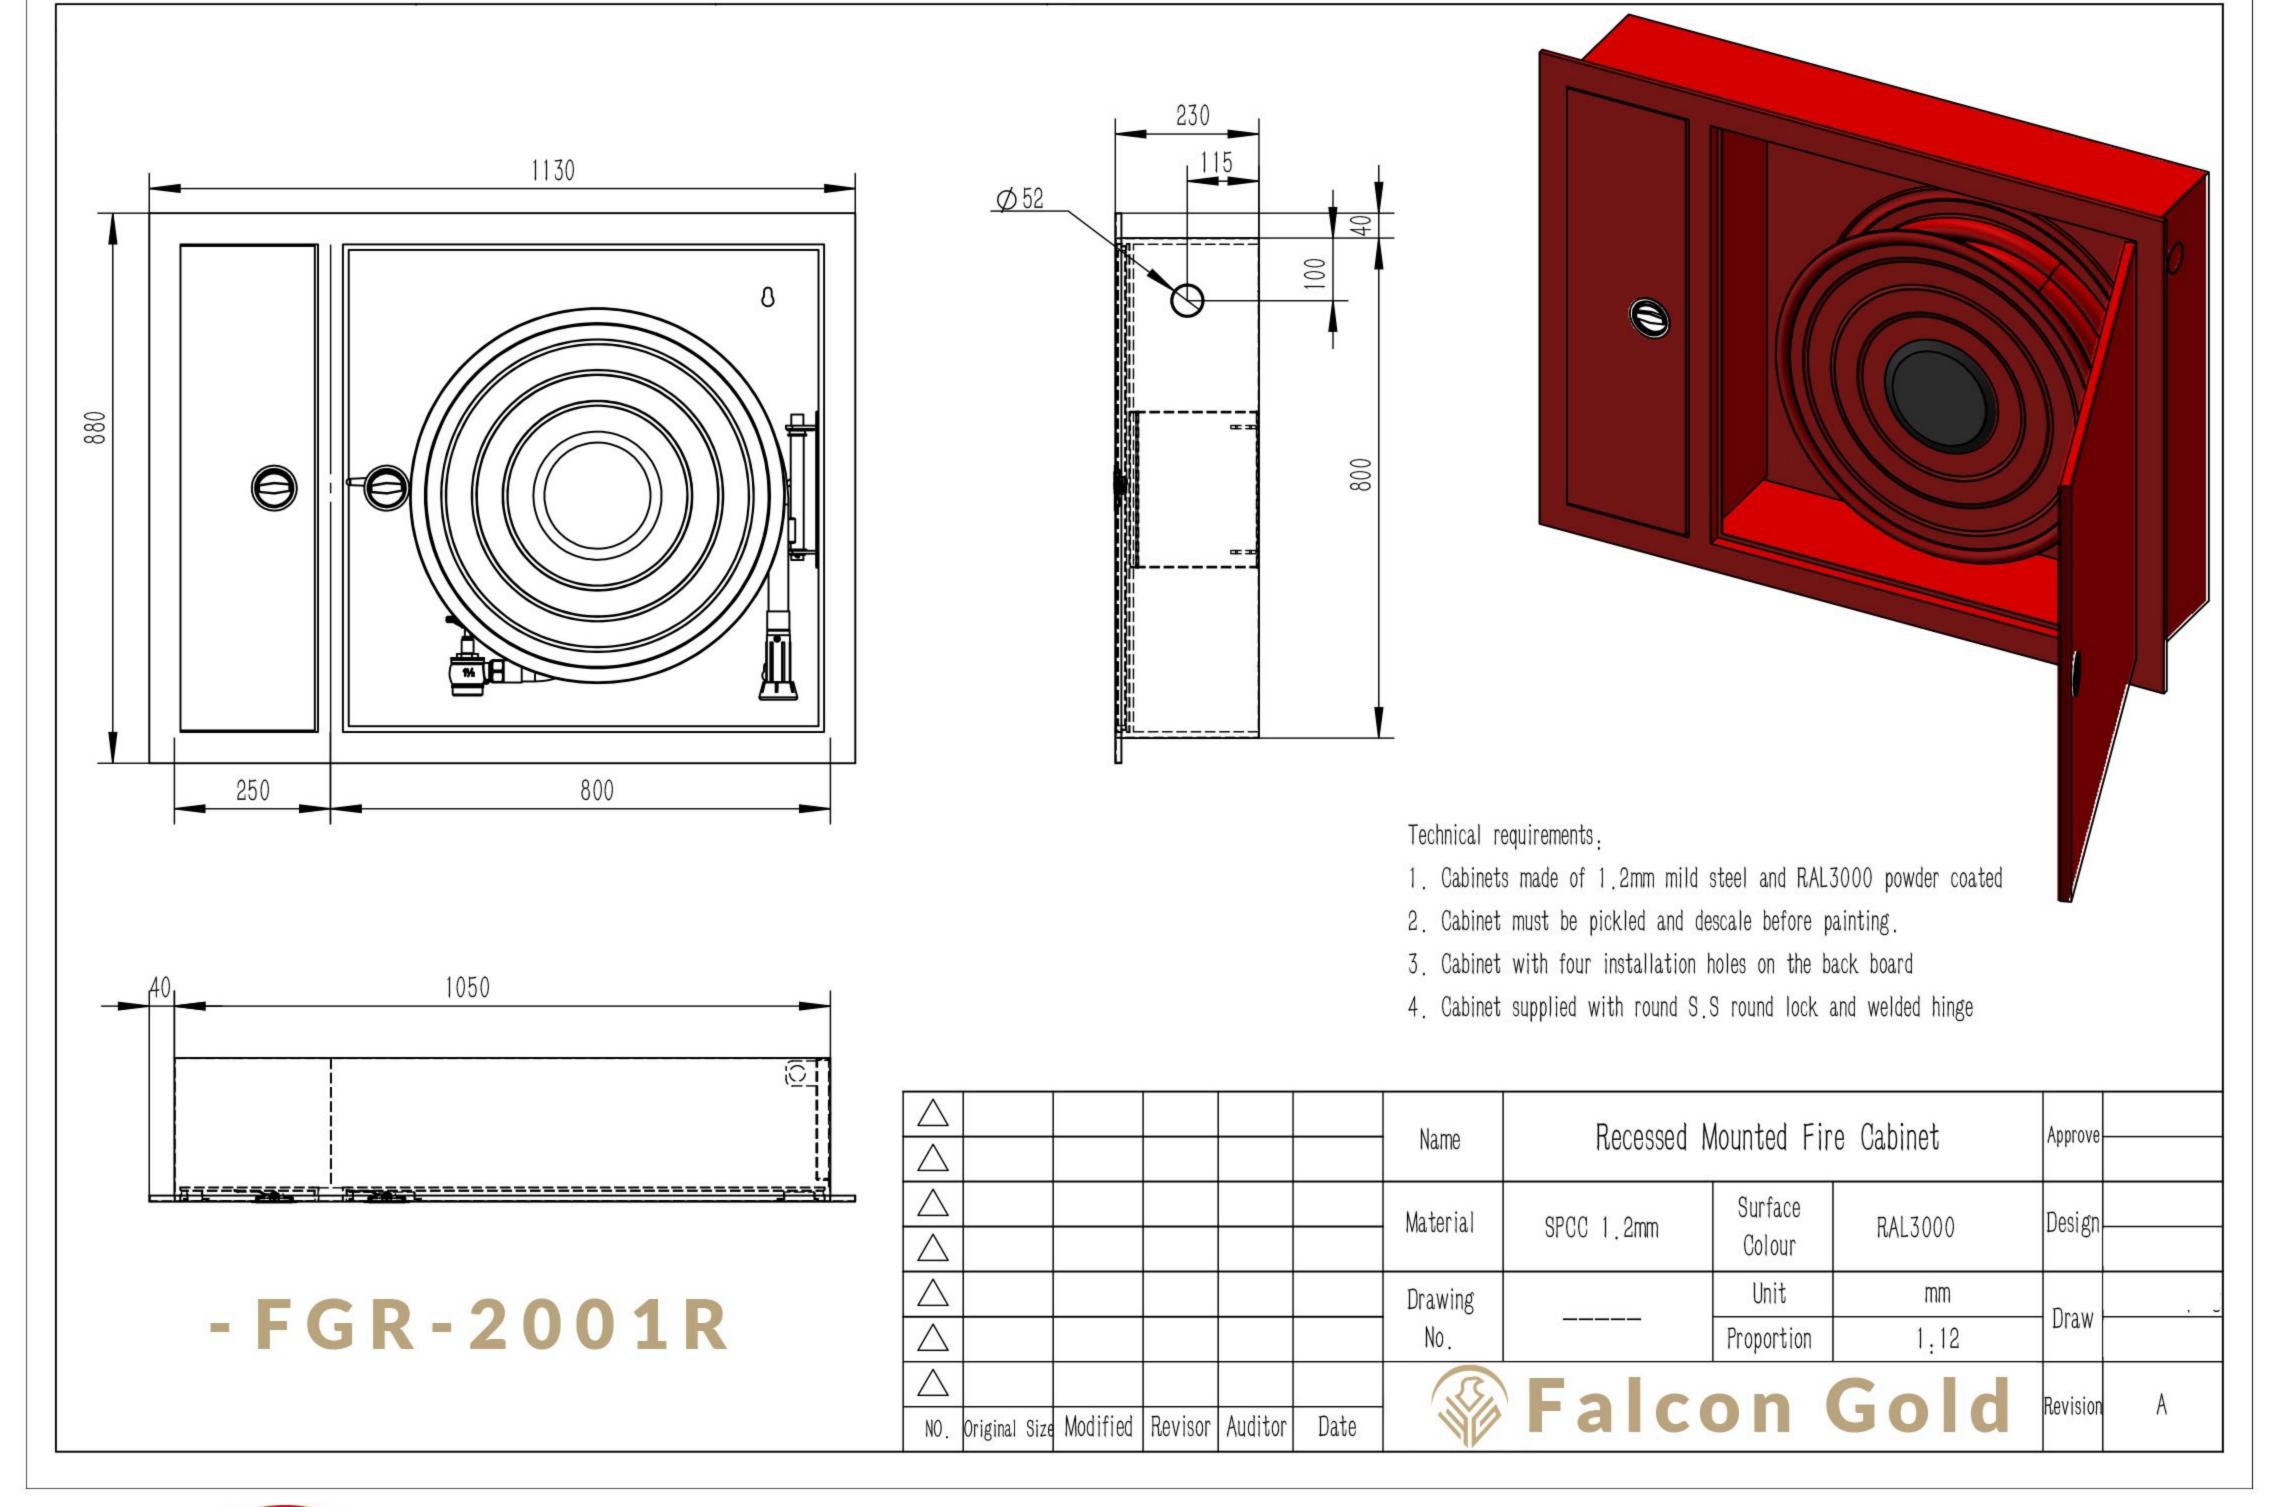




- FIRE CABINET WITH FALCON GOLD HOSE REEL

- CABINET MANUFACTURED FROM MILD STEEL THICKNESS 1.2MM RAL3000 POWDER COATING
- CABINET DIMENSION W 1050MM X H 800MM X D 230 MM
- CABINET FULLY POWDER COATED AND OVEN BAKED FOR APPEARANCE AND PROTECTION FROM RUST.
- SURFACE MOUNTED & RECESSED TYPE, RIGHT HAND OPENED, WITH WELDED HINGE FOR ENOUGH STRENGTH
- CABINET SUPPLIED WITH S.S ROUND LOCK FOR EASY AND FAST OPERATION.
- FULLY APPROVED TO LPCB EN671-1 STANDARD;
- HOSE REEL DRUMS PRESSED ON HYDRAULIC PRESS TO FORM RIBS FOR STRENGTH AND DURABILITY.
- HOSE REEL DISK EDGES ROLLED OVER FOR SAFE HANDLING AND AESTHETIC APPEARANCE.



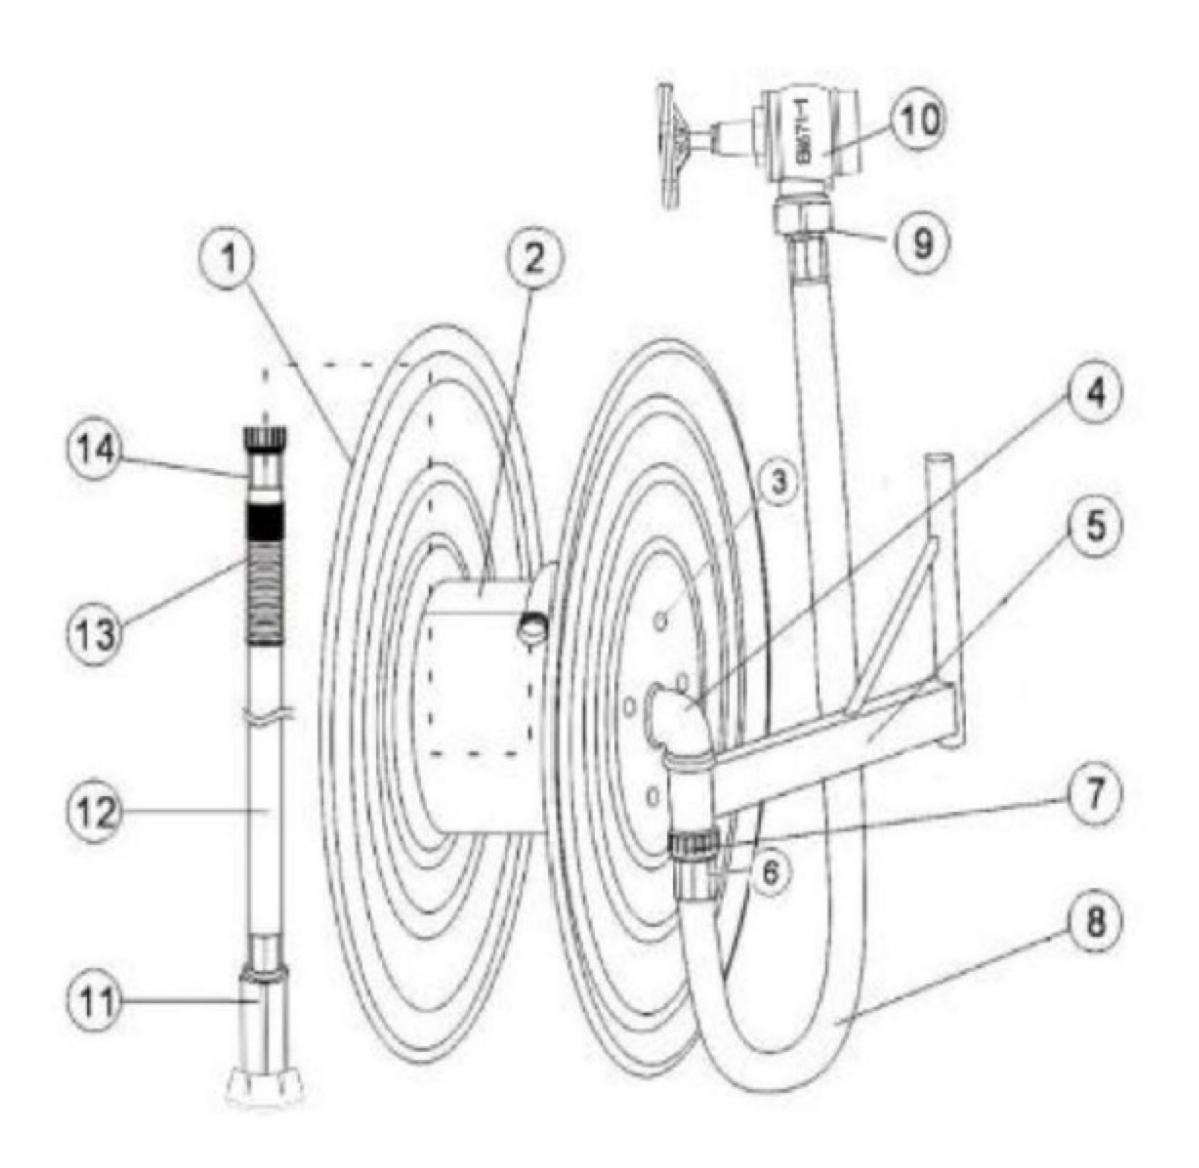



-SWINGING MANUAL HOSE REL ASSY

PARTS NAME

- 1) HOSE REEL DISC 2 HUB 3 LONG SCREW ROD 4 MANUAL WATERWAY 5 SWINGING ARM
- 6 CRIMPING SLEEVE 7 INLET JOINT 8 INLET HOSE 9 CONNECTOR 10 ANGLE VALVE 1.5"-1" A-4 MODEL
- 11 NOZZLE N-04-2 12 FIRE HOSE 25*30MTR 13 PROTECTIVE SPRING 14 OUTLET JOINT

FEATURES

- FULL BRASS WATERWAY WHICH WILL NEVER ROT.WE USE NIPPLES NOT HOSE CLAMPS, TO FILL IN THE INTERFACE BETWEEN HOSE AND WATERWAY. ONCE BEING SCREWED TIGHTLY, NO LEAKAGE.
- HOSE REEL WITH POWDER COATED AND ANTI-ULTRAVIOLET SIDE DISCS. THERE CAN BE PRESSURE GAUGE AT THE REEL AXIS.
- HIGH PRESSURE RESSISTANCE; WORKING AT 30 KG PRESSURE BUT NOT AFFECTED.
- ENDURANCE TEST ON REEL ROTATION; AFTER OVER 3000 ROTATION, HOSE REELS SHOW NO VISIBLE LEAKAGE; OUR SWINGING HOSE REELS SHALL BE ABLE TO SWING 1000 TIMES TO MINIMUM 170° AND ALSO SHOW NO VISIBLE LEAKAGE OR DAMAGE.
- HIGH PRESSURE SPRAY.THE NOZZLE CAN BE ADJUSTED TO JET/SPRAY;
- OUR HOSE REELS CAN BE ALSO USED FOR CLEANING WHEN USED FOR FIRE FIGHTING.
- FIRE HOSE WITH ANTI-AGING AND ANTI-ULTRAVIOLET FUNCTION.MAXIMUM WP. IS 12BAR. EVERAGE BP.CAN BE UP TO 45BAR.

PRODUCT SPECIFICATION & INSTALLATION MEASUREMENT

MODEL	HOSE SPECIFICATION (MM)		BRACKET LENGTH (MM)	REEL WIDTH (MM)	HOSE PRESSUR(BAR)
FG-2001R	25MM×30MTR	600	290	150	12 BAR
FGR-2001R	25MM×30MTR	600	290	150	12 BAR

USAGE

1 OPEN THE VALVE

2 PULL HOSE TOWARDS FIRE

3 OPEN NOZZLE TO SPRAY/JET AND AIM AT BASE OF FIRE.

4 AFTER USE, CLOSE THE VALVE

5 DRAIN WATER FROM HOSE

6 REWIND THE HOSE AND CLOSE NOZZLE 11 .

































توريد بأسعار وجودة لا تقبل المنافسة

فالكون باور السعوديــــة – ٦١١٢ شـــــارع فلسطيـ جــــده ۲۳۳۶ – المملكة العربيـــة السعوديــ

> E-Mail:Info@falconpower.sa Web: www.falconpower.sa

FOR SAFETY EQUIPMENT

Falcon Power Saudi Arabia 6112 palestine Street Jeddah 23341 - Kingdom of Saudi Arabia