



Falcon Gold
YOU ARE SAFE WITH US

FIRE CABINET

A PRODUCT OF Falcon Gold 2024

- MATERIAL SUBMITTAL FOR FIRE HOSE CABINET

- PRODUCT (FG-1001R - FGR-1001R)
- TECHNICAL DATA SHEETS (CATALOGUES).
- LPCB APPROVALS.
- PREVIOUS APPROVALS.



Falcon Gold







-FG-1001R

- SINGLE DOOR,
- SURFACE MOUNTED,
- MILD STEEL,
- FIRE HOSE REEL CABINET



-FGR-1001R

- SINGLE DOOR,
- RECESSED,
- MILD STEEL,
- FIRE HOSE REEL CABINET

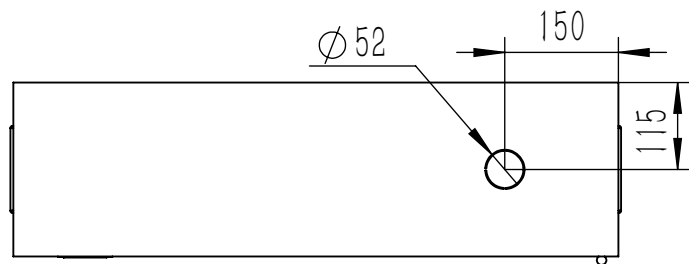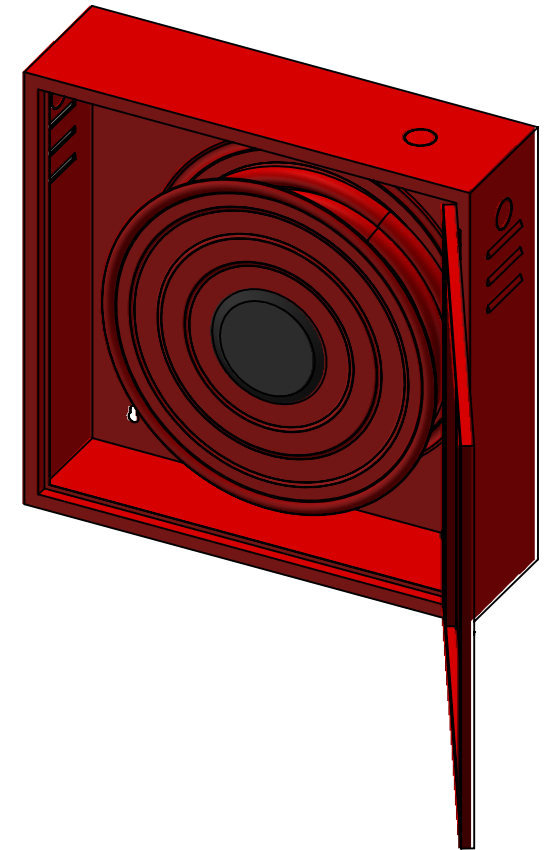
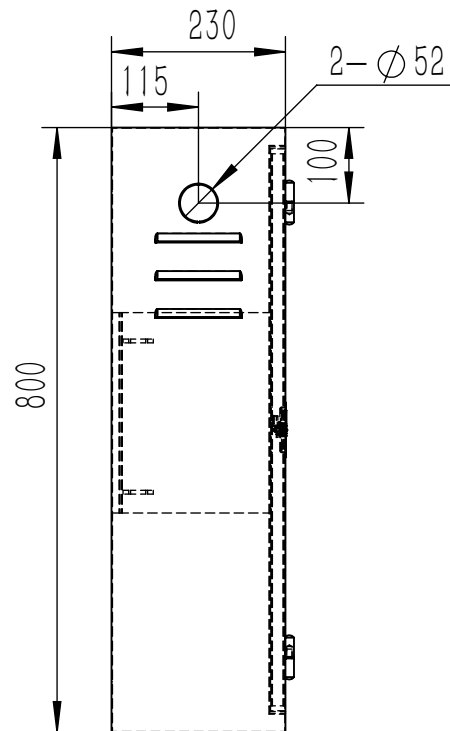
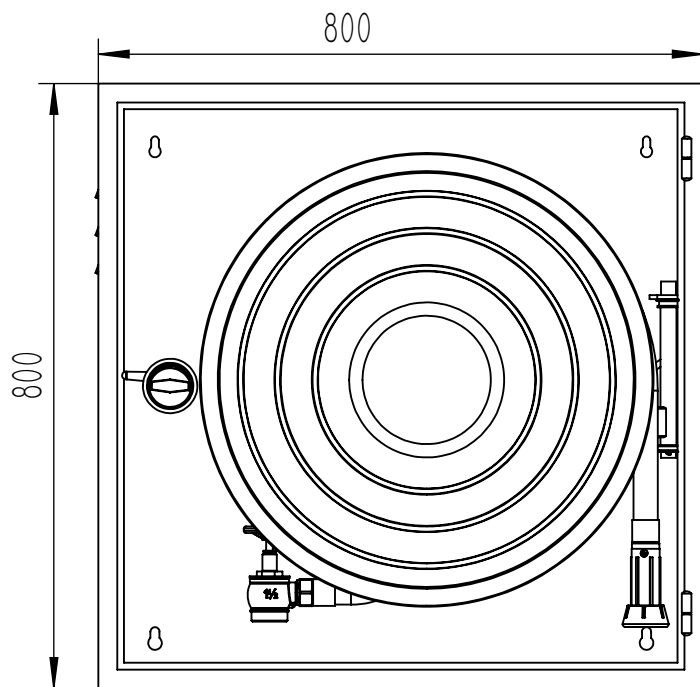


Technical requirements:

1. Cabinets made of 1.2mm mild steel and RAL3000 powder coated
2. Cabinet must be pickled and descale before painting.
3. Cabinet with four installation holes on the back board and two holes at the bottom— ϕ 10 drainage holes at bottom
4. Cabinet supplied with round S.S round lock and welded hinge

- FG - 1001R

△						Name	Surface Mounted Fire Cabinet, 800X800X230			Approve	
△						Material	SPCC1.2MM	Surface Colour	RAL3000	Design	
△						Drawing No.		Unit	mm	Draw	
△								Proportion	1:10		
△						 Falcon Gold				Revision	A
NO.	Original Size	Modified	Revisor	Auditor	Date						

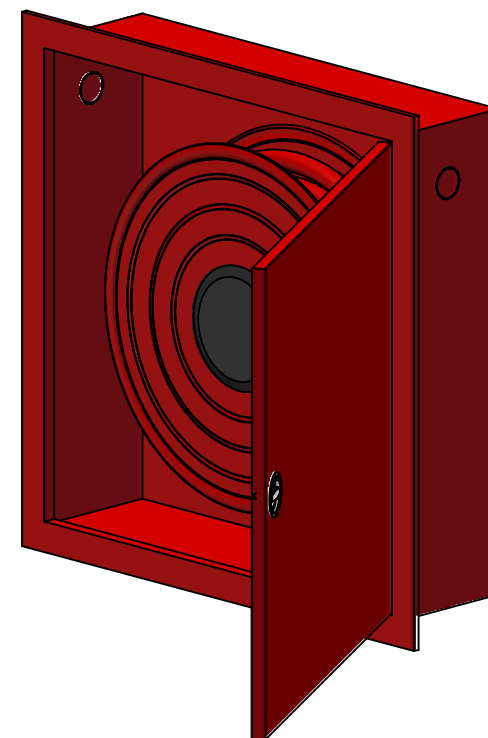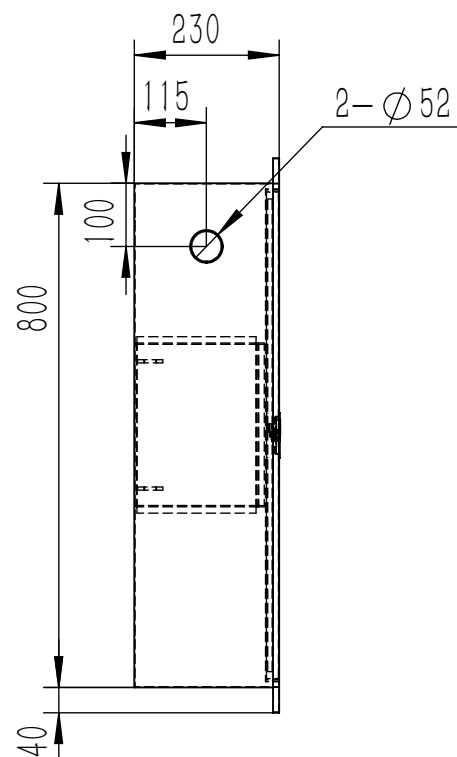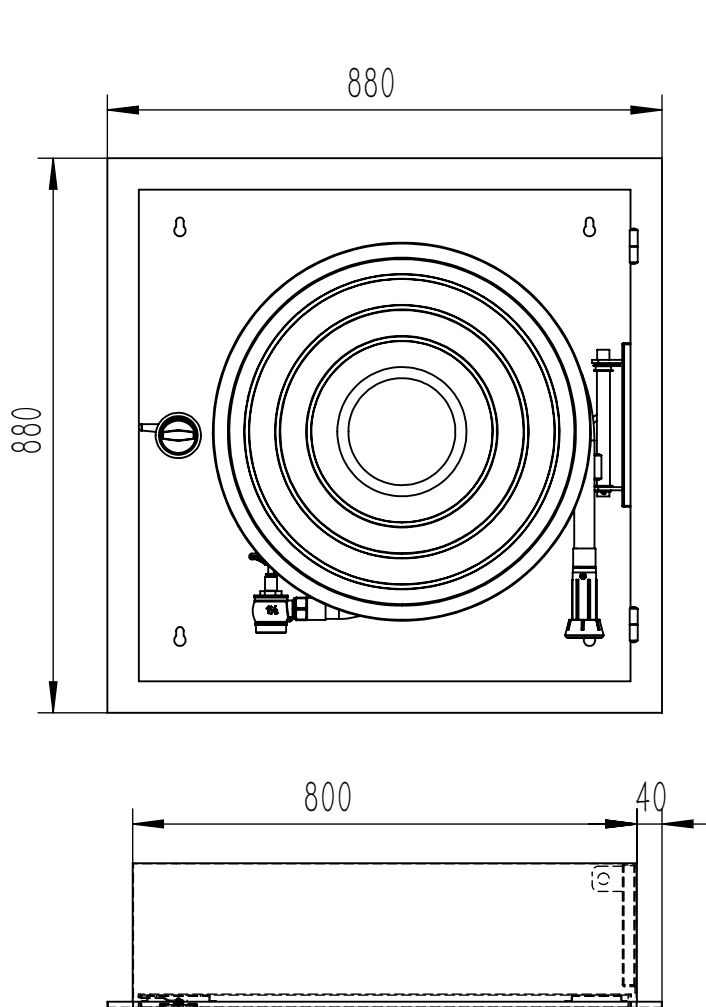

Technical requirements:



1. Cabinets made of 1.2mm mild steel and RAL3000 powder coated.
2. Cabinet must be pickled and descale before painting.
3. Cabinet with four installation holes on the back board
4. Cabinet supplied with round S.S round lock and S.S welded hinge .

- FGR - 1001R

△						Name	Recessed Mounted Fire Cabinet, 800X800X230			Approve	
△						Material	SPCC1.2MM	Surface Colour	RAL3000	Design	
△						Drawing No.		Unit	mm	Draw	
△								Proportion	1:10		
△						 Falcon Gold				Revision	A
△											
	NO.	Original Size	Modified	Revisor	Auditor	Date					

- FIRE CABINET WITH FALCON GOLD HOSE REEL

- CABINET MANUFACTURED FROM MILD STEEL THICKNESS 1.2MM RAL3000 POWDER COATING
- CABINET DIMENSION W 800MM X H 800MM X D 230 MM
- CABINET FULLY POWDER COATED AND OVEN BAKED FOR APPEARANCE AND PROTECTION FROM RUST.
- SURFACE MOUNTED & RECESSED TYPE, RIGHT HAND OPENED, WITH WELDED HINGE FOR ENOUGH STRENGTH
- CABINET SUPPLIED WITH S.S ROUND LOCK FOR EASY AND FAST OPERATION.
- FULLY APPROVED TO LPCB EN671-1 STANDARD;
- HOSE REEL DRUMS PRESSED ON HYDRAULIC PRESS TO FORM RIBS FOR STRENGTH AND DURABILITY.
- HOSE REEL DISK EDGES ROLLED OVER FOR SAFE HANDLING AND AESTHETIC APPEARANCE.

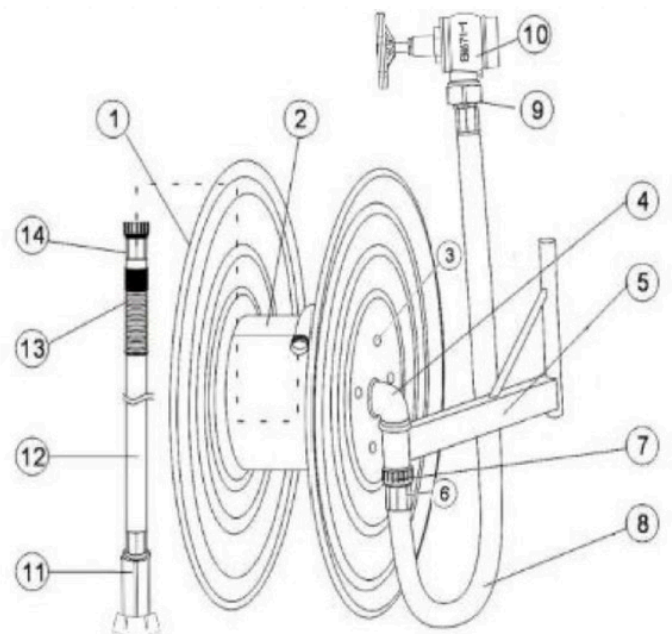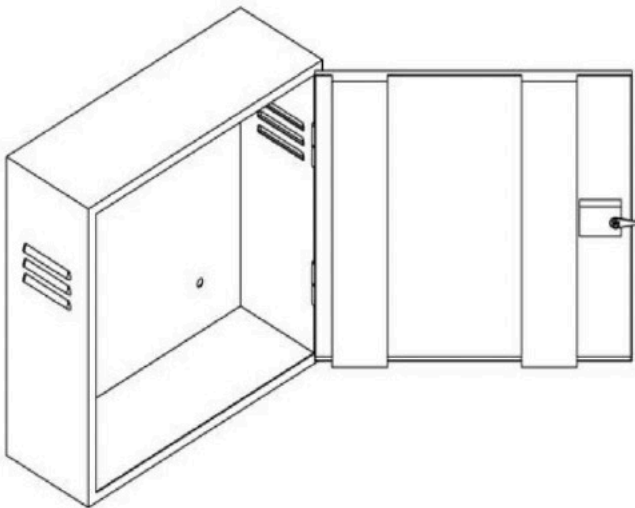

- SWINGING MANUAL HOSE REEL ASSY

● PARTS NAME

- ① HOSE REEL DISC ② HUB ③ LONG SCREW ROD ④ MANUAL WATERWAY ⑤ SWINGING ARM
⑥ CRIMPING SLEEVE ⑦ INLET JOINT ⑧ INLET HOSE ⑨ CONNECTOR ⑩ ANGLE VALVE 1.5"-1" A-4 MODEL
⑪ NOZZLE N-04-2 ⑫ FIRE HOSE 25*30MTR ⑬ PROTECTIVE SPRING ⑭ OUTLET JOINT

● FEATURES

- FULL BRASS WATERWAY WHICH WILL NEVER ROT.WE USE NIPPLES NOT HOSE CLAMPS, TO FILL IN THE INTERFACE BETWEEN HOSE AND WATERWAY. ONCE BEING SCREWED TIGHTLY,NO LEAKAGE.
- HOSE REEL WITH POWDER COATED AND ANTI-ULTRAVIOLET SIDE DISCS. THERE CAN BE PRESSURE GAUGE AT THE REEL AXIS.
- HIGH PRESSURE RESSISTANCE;WORKING AT 30 KG PRESSURE BUT NOT AFFECTED.
- ENDURANCE TEST ON REEL ROTATION; AFTER OVER 3000 ROTATION ,HOSE REELS SHOW NO VISIBLE LEAKAGE;OUR SWINGING HOSE REELS SHALL BE ABLE TO SWING 1000 TIMES TO MINIMUM 170° AND ALSO SHOW NO VISIBLE LEAKAGE OR DAMAGE.
- HIGH PRESSURE SPRAY.THE NOZZLE CAN BE ADJUSTED TO JET/SPRAY;
- OUR HOSE REELS CAN BE ALSO USED FOR CLEANING WHEN USED FOR FIRE FIGHTING.
- FIRE HOSE WITH ANTI-AGING AND ANTI-ULTRAVIOLET FUNCTION.MAXIMUM WP. IS 12BAR. EVERAGE BP.CAN BE UP TO 45BAR.

● PRODUCT SPECIFICATION & INSTALLATION MEASUREMENT

MODEL	HOSE SPECIFICATION (MM)	DIAMETER (MM)	BRACKET LENGTH (MM)	REEL WIDTH (MM)	HOSE PRESSUR(BAR)
FG-1001R	25MM×30MTR	600	290	150	12 BAR
FGR-1001R	25MM×30MTR	600	290	150	12 BAR

● USAGE

- 1 OPEN THE VALVE
2 PULL HOSE TOWARDS FIRE
3 OPEN NOZZLE TO SPRAY/JET AND AIM AT BASE OF FIRE.
4 AFTER USE,CLOSE THE VALVE
5 DRAIN WATER FROM HOSE
6 REWIND THE HOSE AND CLOSE NOZZLE⑪ .



Falcon Gold

YOU ARE SAFE WITH US

Let's Connect us



+971524312926
+971526299153
+97143340813



INFO@FALCON-GOLD.COM



WWW.FALCON-GOLD.COM