

# FIRE CABINET

A PRODUCT OF Falcon Gold 2024

### - MATERIAL SUBMITTAL FOR FIRE HOSE CABINET

- PRODUCT (FG-2001S FGR-2001S)
- TECHNICAL DATA SHEETS (CATALOGUES).
- LPCB APPROVALS.
- PREVIOUS APPROVALS.















## -FG-2001S

- DOUBLE DOOR,
- SURFACE MOUNTED,
- STAINLESS STEEL
- FIRE HOSE REEL CABINET












## -FGR-2001S


- DOUBLE DOOR,
- RECESSED
- STAINLESS
- FIRE HOSE REEL CABINET

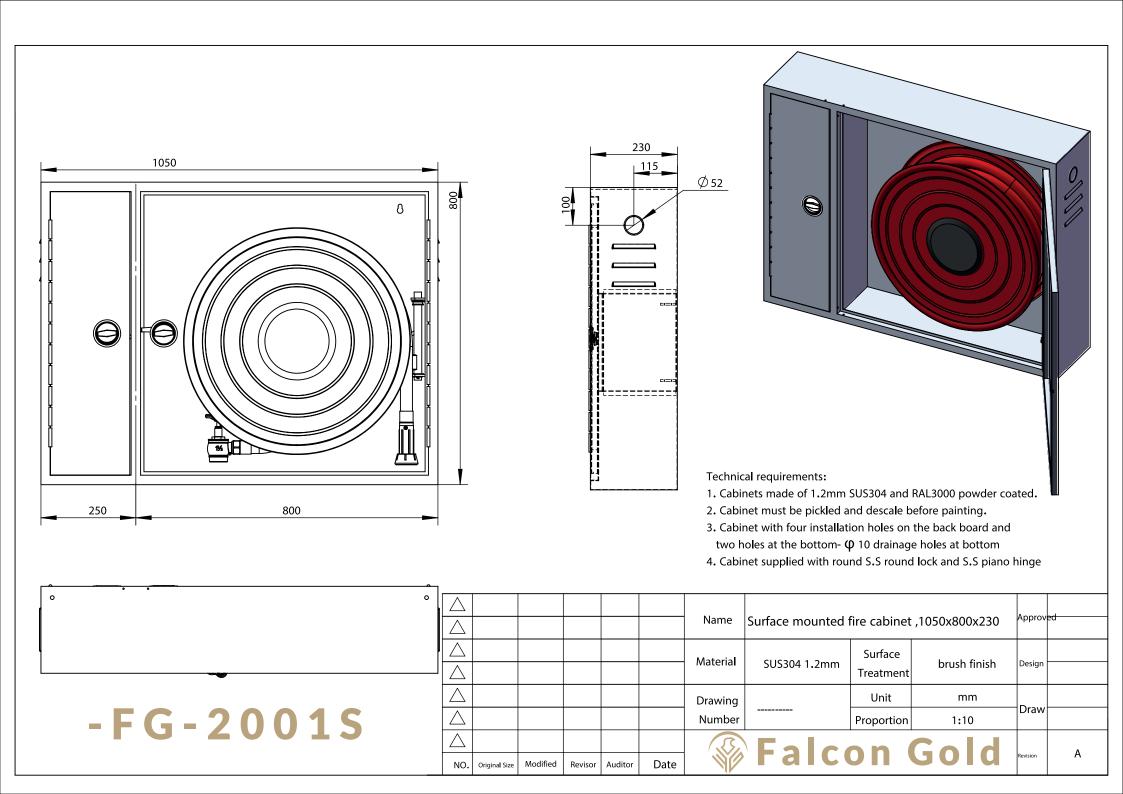

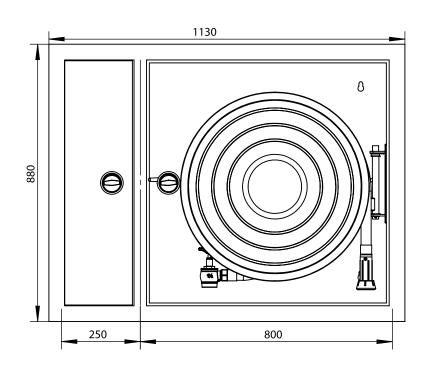

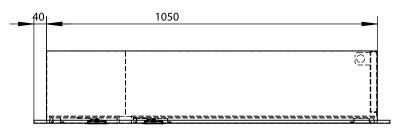

-FGR-2001S

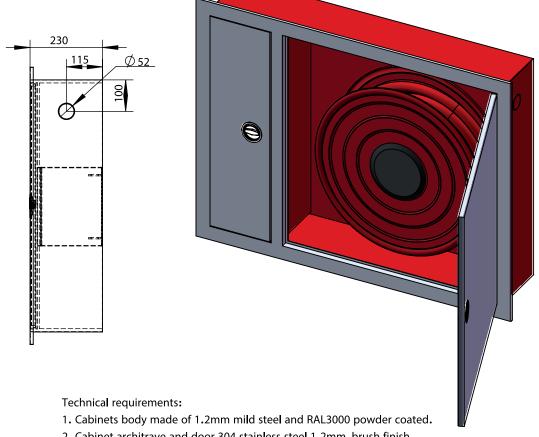


- 2. Cabinet architrave and door 304 stainless steel 1.2mm, brush finish.
- 3. Cabinet must be pickled and descale before painting.
- 4. Cabinet with four installation holes on the back board
- 5. Cabinet supplied with round S.S round lock and S.S piano hinge.

	7					Name	Recessed Mounted Fire Cabinet			Approve	
	2					Material	SUS301 1.2MM+ SPCC 1.2mm	Surface Colour	RAL3000	Design	
	7					Drawing		Unit	mm	Draw	
	7					No.		Proportion	1:10		
	7						Revision	A			
N	Original S	ze Modified	Revisor	Auditor	Date						

# - FIRE CABINET WITH FALCON GOLD HOSE REEL

- SURFACE MOUNTED CABINET MANUFACTURED FROM-FULLY STAINLESS 304 THICKNESS 1.2MM.
- CABINET DIMENSION W 1050MM X H 800MM X D 230 MM
- RECESED CABINET ONLY DOOR STAINLESS STEEL OTHER POWDER COATED AND OVEN BAKED
  - FOR APPEARANCE AND PROTECTION FROM RUST.
- SURFACE MOUNTED & RECESSED TYPE, RIGHT HAND OPENED,
  WITH STAINLESS STEEL PIANO HINGE FOR ENOUGH STRENGTH
- CABINET SUPPLIED WITH S.S ROUND LOCK FOR EASY AND FAST OPERATION.
- FULLY APPROVED TO LPCB EN671-1 STANDARD:
- HOSE REEL DRUMS PRESSED ON HYDRAULIC PRESS TO FORM RIBS FOR STRENGTH AND DURABILITY.
- HOSE REEL DISK EDGES ROLLED OVER FOR SAFE HANDLING AND AESTHETIC APPEARANCE.



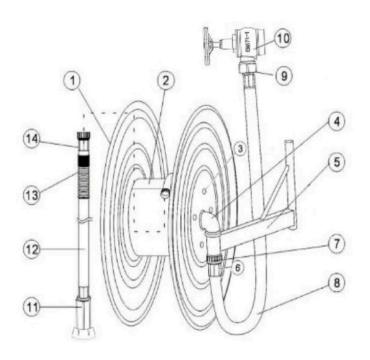

### - SWINGING MANUAL HOSE REEL ASSY

### PARTS NAME

- 1) HOSE REEL DISC 2 HUB 3 LONG SCREW ROD 4 MANUAL WATERWAY 5 SWINGING ARM
- **© CRIMPING SLEEVE (7) INLET JOINT (8) INLET HOSE (9) CONNECTOR (DANGLE VALVE 1.5"-1" A-4 MODEL**
- (1) NOZZLE N-04-2 (12) FIRE HOSE 25\*30MTR (13) PROTECTIVE SPRING (14) OUTLET JOINT

#### FEATURES

- FULL BRASS WATERWAY WHICH WILL NEVER ROT.WE USE NIPPLES NOT HOSE CLAMPS, TO FILL IN THE INTERFACE BETWEEN HOSE AND WATERWAY. ONCE BEING SCREWED TIGHTLY.NO LEAKAGE.
- HOSE REEL WITH POWDER COATED AND ANTI-ULTRAVIOLET SIDE DISCS. THERE CAN BE PRESSURE GAUGE AT THE REEL AXIS.
- HIGH PRESSURE RESSISTANCE: WORKING AT 30 KG PRESSURE BUT NOT AFFECTED.
- ENDURANCE TEST ON REEL ROTATION; AFTER OVER 3000 ROTATION, HOSE REELS SHOW NO VISIBLE LEAKAGE; OUR SWINGING HOSE REELS SHALL BE ABLE TO SWING 1000 TIMES TO MINIMUM 170° AND ALSO SHOW NO VISIBLE LEAKAGE OR DAMAGE.
- HIGH PRESSURE SPRAY.THE NOZZLE CAN BE ADJUSTED TO JET/SPRAY;
- OUR HOSE REELS CAN BE ALSO USED FOR CLEANING WHEN USED FOR FIRE FIGHTING.
- FIRE HOSE WITH ANTI-AGING AND ANTI-ULTRAVIOLET FUNCTION.MAXIMUM WP. IS 12BAR. EVERAGE BP.CAN BE UP TO 45BAR.

### PRODUCT SPECIFICATION & INSTALLATION MEASUREMENT

	MODEL	HOSE SPECIFICATION (MM)		BRACKET LENGTH (MM)	REEL WIDTH (MM)	HOSE PRESSUR(BAR)
F	G-2001S	25MM×30MTR	600	290	150	12 BAR
F	GR-2001S	25MM×30MTR	600	290	150	12 BAR

#### USAGE

**1 OPEN THE VALVE** 

**2 PULL HOSE TOWARDS FIRE** 

3 OPEN NOZZLE TO SPRAY/JET AND AIM AT BASE OF FIRE.

**4 AFTER USE, CLOSE THE VALVE** 

**5 DRAIN WATER FROM HOSE** 

**6 REWIND THE HOSE AND CLOSE NOZZLE** ①.



YOU ARE SAFE WITH US

Let's Connect us



+971524312926

+971526299153

+97143340813



**INFO@FALCON-GOLD.COM** 



WWW.FALCON-GOLD.COM